



Applied Stop

Applied Stop Installation

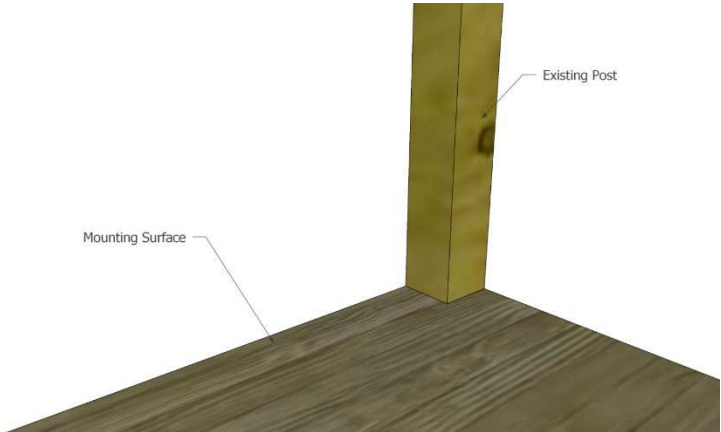


The Applied Stop extrusion is used to install an enclosure under an existing roof and between existing framing members.

All corners are mitered. Apply sealant and secure the Applied Stop with anchors appropriate to the mounting surface.

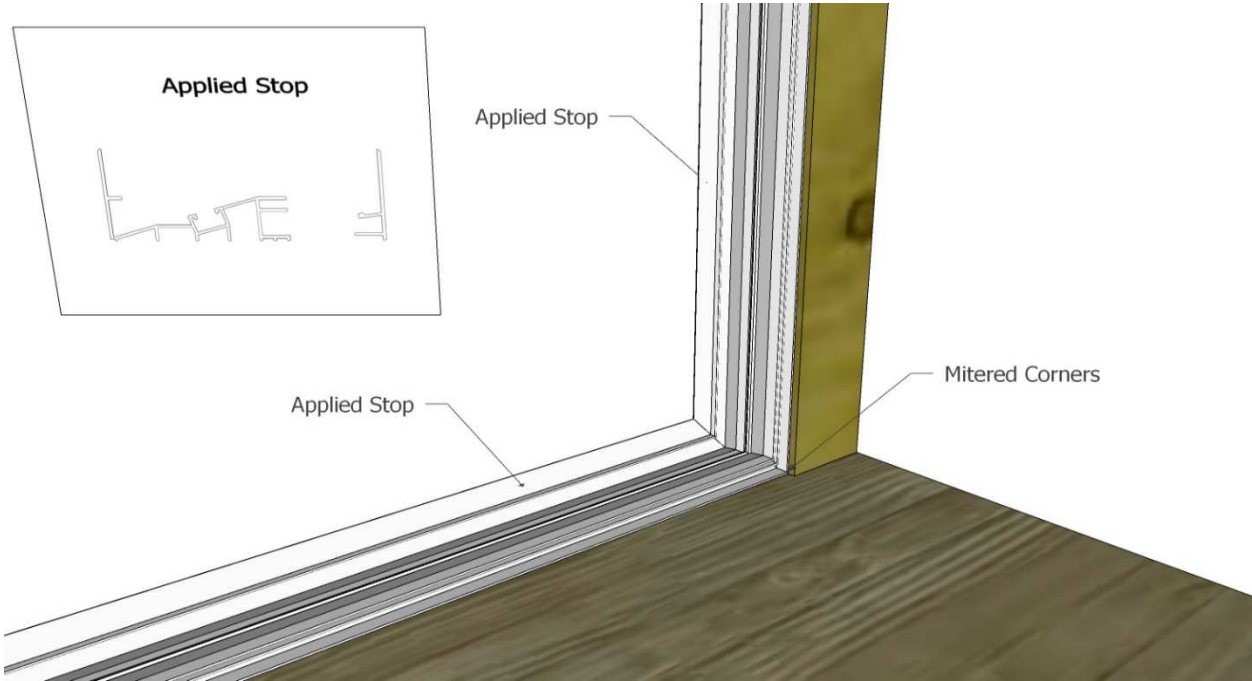

After the Applied Stop is installed into the wall opening, begin installing the wall components following the plan for the enclosure and using the normal installation procedures.

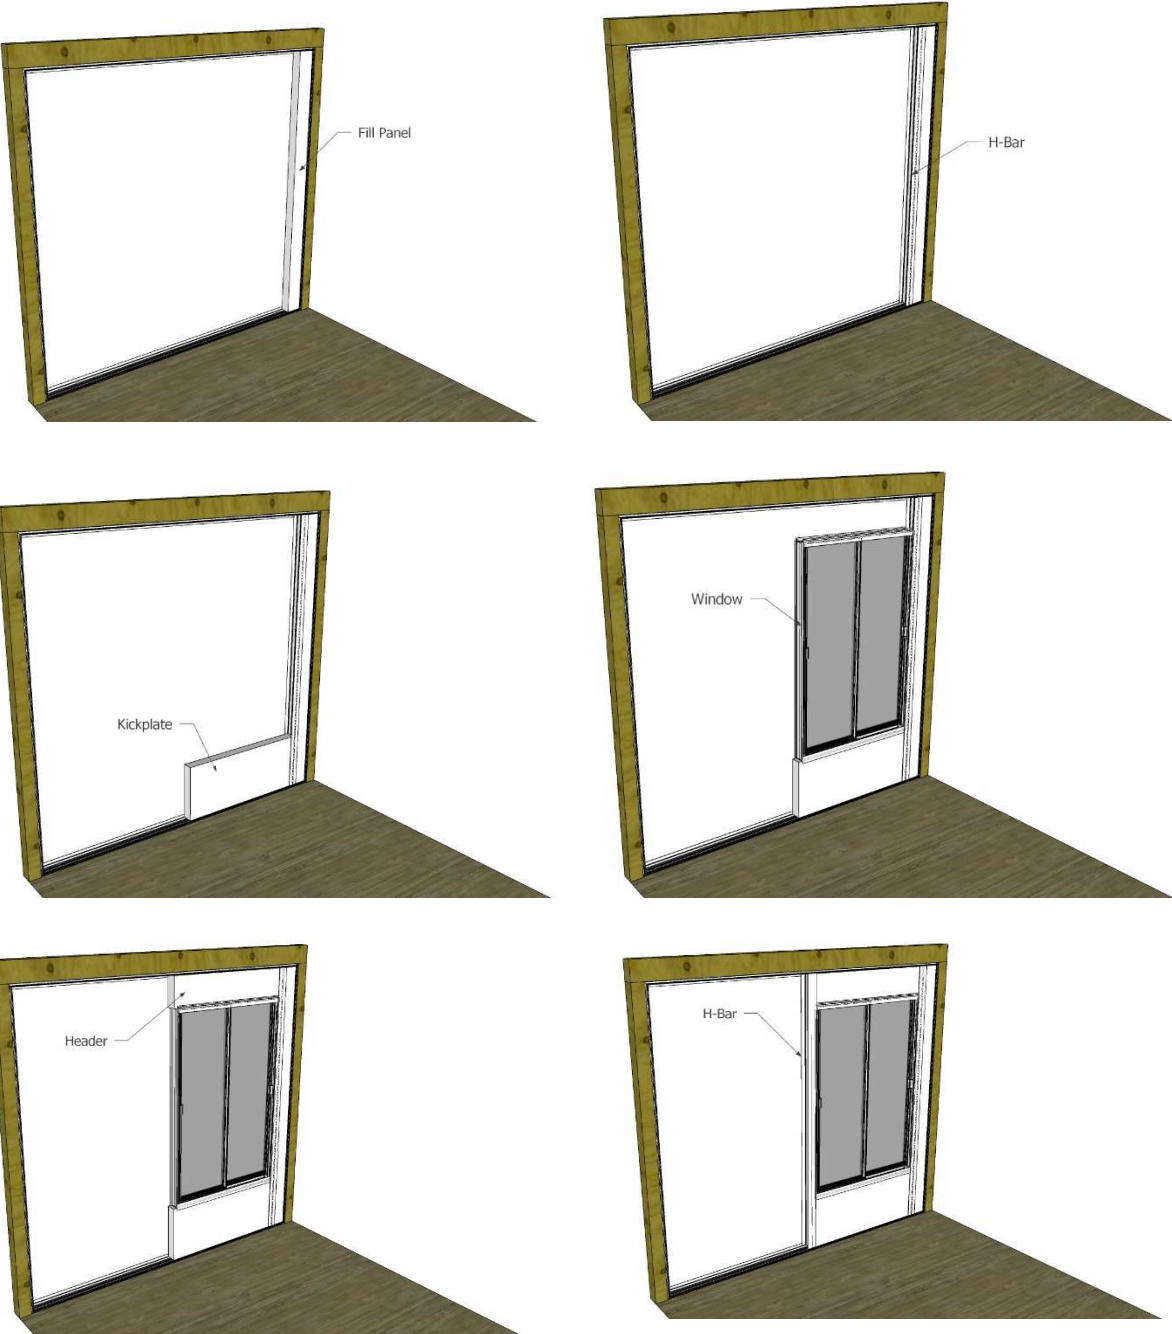



After the wall components are installed, the cap may be snapped into place on the Applied Stop. The cap is designed to be a tight fit and a rubber mallet will be helpful to install it. Corners should be mitered.

